

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/857867

INTERNATIONAL APPLICATION NO.

PCT/GB00/03820

INTERNATIONAL FILING DATE

October 2000

PRIORITY DATE CLAIMED

12 October 1999

TITLE OF INVENTION

Adjustable Safety Cable

APPLICANT(S) FOR DO/EO/US

Stephen Murten

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
- a. ☒ is attached hereto (required only if not communicated by the International Bureau).
- b. ☐ has been communicated by the International Bureau.
- c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
- a. ☐ is attached hereto.
- b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
- a. ☐ are attached hereto (required only if not communicated by the International Bureau).
- b. ☐ have been communicated by the International Bureau.
- c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
- d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

## Items 11 to 20 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☐ Other items or information:

09/857867

PCT/GB00/03820

12 JUN 2001

21. ☒ The following fees are submitted:**BASIC NATIONAL FEE** (37 CFR 1.492 (a) (1) - (5)):

Neither international preliminary examination fee (37 CFR 1.482)  
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO  
and International Search Report not prepared by the EPO or JPO. .... \$1000.00

International preliminary examination fee (37 CFR 1.482) not paid to  
USPTO but International Search Report prepared by the EPO or JPO ..... \$860.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO  
but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$710.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO  
but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$690.00

International preliminary examination fee (37 CFR 1.482) paid to USPTO  
and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =****CALCULATIONS PTO USE ONLY**

\$ 860.00

\$ 130.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☒ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(e)).

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	20 - 20 =	0	x \$18.00
Independent claims	4 - 3 =	1	x \$80.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00
<b>TOTAL OF ABOVE CALCULATIONS =</b>			\$ 1,070.00
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.			+ \$ 535.00
<b>SUBTOTAL =</b>			\$ 535.00
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			\$
<b>TOTAL NATIONAL FEE =</b>			\$ 535.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +			\$
<b>TOTAL FEES ENCLOSED =</b>			\$ 535.00
			Amount to be refunded: \$
			charged: \$

a. ☒ A check in the amount of \$ 535.00 to cover the above fees is enclosed.b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 02-3704. A duplicate copy of this sheet is enclosed.d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

James C. Wray  
1493 Chain Bridge Road, Suite 300  
McLean, VA 22101

12 June 2001

SIGNATURE

James C. Wray

NAME

22,693

REGISTRATION NUMBER

09/857867

531 Rec'd PCT. 12 JUN 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

STEPHEN MURTEN

Serial No.: To be assigned

Filed: June 12, 2001

For: ADJUSTABLE SAFETY CABLE

PRELIMINARY AMENDMENT

To the Director of Patents and Trademarks

Sir:

Before considering this application, kindly amend the application as follows:

In the Abstract:

Kindly enter and approve the abstract attached hereto.

In the Claims:

Kindly amend claims 3, 4, 6, 9, 10, 13, 14, 16, 19 and 20 as follows:

3. (Amended) Apparatus according to claim 1, wherein said substantial vertical supports comprise an upper and a lower tube.

4. (Amended) Apparatus according to claim 1, wherein said upper tubes of substantially vertical supports are equipped with an internal and an external strengthening component.

6. (Amended) Apparatus according to claim 1, wherein the diameter of said lower tube is different from the diameter of

09857867-091001  
T00T60 29325860

09857867, 091001

said upper tube so that said upper and lower tubes can slide vertically independently of one another.

9. (Amended) Apparatus according to claim 1 wherein said supporting cable is made of a highly tensile material.

10. (Amended) Apparatus according to claim 1 wherein the tension of said supporting cable is adjustable by cable-clamping devices implemented on said substantially vertical supports.

13. (Amended) A method according to claim 11, wherein said substantial vertical supports comprise an upper and a lower tube.

14. (Amended) A method according to claim 11, wherein said upper tubes of substantially vertical supports are equipped with an internal and an external strengthening component.

16. (Amended) A method according to claim 11, wherein the diameter of said lower tube is different from the diameter of said upper tube so that said upper and lower tubes can slide vertically independently of one another.

19. (Amended) A method according to claim 11 wherein said supporting cable is made of a highly tensile material.

20. (Amended) A method according to claim 11 wherein the tension of said supporting cable is adjustable by cable-clamping devices implemented on said substantially vertical supports.

**REMARKS UNDER 37 C.F.R. 1.111**


Reconsideration and allowance are respectfully requested.

Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached page is captioned "Version with markings to show changes made".

Reconsideration and allowance are respectfully requested.

Entry of the amendment and consideration and allowance of all claims are respectfully requested.

Respectfully,

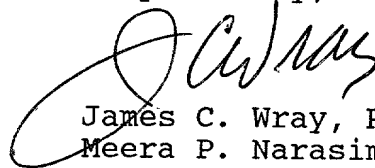

James C. Wray, Reg. No. 22,693  
Meera P. Narasimhan, Reg. No. 40,252  
1493 Chain Bridge Road  
Suite 300  
McLean, Virginia 22101  
Tel: (703) 442-4800  
Fax: (703) 448-7397

June 12, 2001

VERSION WITH MARKINGS TO SHOW CHANGES MADE

In the Claims:

Claims 3, 4, 6, 9, 10, 13, 14, 16, 19 and 20 have been amended as below:

3. (Amended) Apparatus according to claim[s] 1 [and 2], wherein said substantial vertical supports comprise an upper and a lower tube.

4. (Amended) Apparatus according to claim[s] 1 [to 3], wherein said upper tubes of substantially vertical supports are equipped with an internal and an external strengthening component.

6. (Amended) Apparatus according to claim[s] 1 [to 4], wherein the diameter of said lower tube is different from the diameter of said upper tube so that said upper and lower tubes can slide vertically independently of one another.

9. (Amended) Apparatus according to claim 1 [or 8] wherein said supporting cable is made of a highly tensile material.

10. (Amended) Apparatus according to claim 1 [or 9] wherein the tension of said supporting cable is adjustable by cable-clamping devices implemented on said substantially vertical supports.

13. (Amended) A method according to claim[s] 11 [and 12], wherein said substantial vertical supports comprise an upper and a lower tube.

14. (Amended) A method according to claim[s] 11 [to 13], wherein said upper tubes of substantially vertical supports are equipped with an internal and an external strengthening component.

16. (Amended) A method according to claim[s] 11 [to 14], wherein the diameter of said lower tube is different from the diameter of said upper tube so that said upper and lower tubes can slide vertically independently of one another.

19. (Amended) A method according to claim 11 [or 18] wherein said supporting cable is made of a highly tensile material.

20. (Amended) A method according to claim 11 [or 19] wherein the tension of said supporting cable is adjustable by cable-clamping devices implemented on said substantially vertical supports.

## ABSTRACT OF THE DISCLOSURE

The disclosed safety apparatus for the erection of structures and method for erection thereof comprises a first substantially vertical support, a second substantially vertical support and a supporting cable extending between said first and second supports, wherein said vertical supports are configured to be adjustable in length and each includes a first fixing means and a second fixing means such that the length of a support may be adjusted by releasing said first fixing means and then re-fixing said first fixing means after said adjustment has been made.

100760" 4934350



WO 01/27411

12/PRTS

PCT/GB00/03820

09/857867

531 Rec'd PCT

12 JUN 2001

## Adjustable Safety Cable

### Background of the Invention

In order to erect structures such as buildings, scaffoldings are usually required to be erected prior to any other work carried out on the building itself.

People who erect scaffoldings are known in the art as scaffolders and are required to erect such scaffolds in conditions that, by necessity, place them at risk of falling from a relatively high elevation during the course of their work.

### 1. Field of the Invention

The present invention relates to a safety apparatus for the erection of structures, which provides safety to users before they are placed at risk.

### 2. Description of the Related Art

Numerous types of safety apparatus exist to prevent such occurrences, such as described in United Kingdom Patent 2 311 554. However, such systems require the scaffolder to first escalate the scaffold, irrespective of its height, without the benefit of being safely attached to any safety apparatus, and only being able to anchor himself to said safety apparatus once he has reached his area of work.

Such a problem is encountered both at the time of climbing onto the scaffold, for instance at the beginning of the working day and, subsequently, also at the time of coming off the scaffold, for instance at the end of the working day. Moreover, each time a higher level of scaffolding requires erecting, scaffolders are hence required to climb up the scaffolding

WO 01/27411

PCT/GB00/03820

2

and existing apparatus do not allow them to do so whilst benefiting from being safely attached to any safety apparatus. Indeed, a scaffolder must first release his anchor from said safety apparatus, then climb up to the new level of scaffolding whereafter he can secure the existing apparatus in place, said scaffolder being constantly at risk of falling. Only then can he and his co-workers anchor to said safety apparatus.

### Brief Summary of the Invention

According to a first aspect of the present invention, there is provided a safety apparatus for the erection of structures, comprising a first substantially vertical support; a second substantially vertical support; and a supporting cable extending between said first and second supports, wherein said vertical supports are configured to be adjustable in length and each includes a first fixing means and a second fixing means such that the length of a support may be adjusted by releasing said first fixing means and then re-fixing said first fixing means after said adjustment has been made. The invention therefore provides a means for providing constant safety to said scaffolder such that he is constantly tethered to said safety apparatus whilst scaling and erecting scaffoldings, independently of the height that said scaffold must be erected to.

According to a second aspect of the invention, there is provided a method of erecting safety apparatus during the assembly of a structure, comprising the steps of attaching the first substantially vertical support to said structure; attaching the second substantially vertical support to said structure; extending a cable between said first and second supports and attaching a safety harness to said cable, wherein said vertical supports are configured to be adjustable in length and each includes a first fixing means

WO 01/27411

PCT/GB00/03820

3

and a second fixing means such that the length of a support may be adjusted by releasing said first fixing means and then re-fixing said fixing means after said adjustment.

5 The invention will now be described by way of example only with reference to the following drawings.

#### Brief Description of the Several Views of the Drawings

*Figure 1* is an isometric view of a scaffold erected;

10 *Figure 2* is an isometric view of a scaffold erected, with the safety apparatus in place;

*Figure 3* is a side view of the first and second substantially vertical supports and of the supporting cable of said safety apparatus, which embodies the present invention;

15 *Figure 4* is a side view of a detail of the first substantially vertical support of said safety apparatus, illustrating the anchoring of the supporting cable and the external strengthener component at the base of an upper tube of said first substantially vertical support;

20 *Figure 5* is a perspective view of the device which embodies first and second fixing means;

*Figure 6* is a side view of a system of pulleys and rope combination, used to adjust the height of both an upper and lower tube of a substantially vertical support relative to on another;

*Figure 7* is an isometric view of a first level of scaffolding with the safety apparatus in place;

25 *Figure 8* details steps performed to adjust the length of the substantially vertical supports;

*Figure 9* is an isometric view of a first and second level of scaffolding

WO 01/27411

PCT/GB00/03820

4

with the safety apparatus in place, wherein the length of said safety apparatus has been adjusted;

*Figure 10* shows a first, second and third level of scaffolding with the safety apparatus in place, wherein the length of said safety apparatus has been adjusted and said safety apparatus is extended to its maximum length;

*Figure 11* is an isometric view of a scaffold featuring multiple levels with the safety apparatus in place, wherein the length of said safety apparatus has been adjusted; and

*Figure 12* illustrates an alternative embodiment of the invention, wherein multiple supporting cables are implemented.

#### Best Mode for Carrying Out the Invention

*Figure 1* shows a scaffold 101, comprising of vertical poles 102, horizontal poles 103, transversal poles 104 and flat sections 105. It also comprises diagonal strengthener poles 106.

Typically, the erection of the scaffold requires firstly, the erection of the vertical poles 102 and secondly, fitting of the horizontal poles 103. Transversal poles 104 are then implemented to confer additional stability and integrity to the scaffold before the flat sections 105 are put in place. The diagonal strengthener pole 106 are then implemented to confer additional stability and integrity to the ensemble.

Current safety apparatus for scaffolders who erect this type of structure consists mainly of a lanyard tethering a safety harness worn by the scaffolder to any of the scaffold poles that constitute the scaffold. Such a lanyard is typically five feet length, thus restricting the working area for any scaffolder wearing this safety apparatus to five feet either side of the

WO 01/27411

PCT/GB00/03820

5

anchoring point of the lanyard.

Upon completing work necessary to the erection of a higher flat surface, which can be partially achieved whilst standing on the flat surface immediately underneath, a scaffolder must then unhook his lanyard from its anchoring point on the scaffold, climb to the new higher level of the scaffold untethered at the risk of falling from the scaffold in order to reach the parts of the ensemble that requires further work, such as tightening bolts or fixtures, and then set up the safety apparatus again.

Once in place, he can then tether his lanyard to safety apparatus and carry out further tasks. Alternatively, should other scaffolders be working on said scaffold with the first scaffolder, they also must unfasten their lanyard from safety apparatus and climb to the higher level untethered, at the risk of falling from the scaffold.

Figure 2 shows the same scaffold 101 fully erected and equipped with the present invention.

A first substantially vertical support 201 consists of a lower tube 204 and an upper tube 205. Said lower tube 204 has a larger diameter than upper tube 205 so that upper tube 205 may slide vertically within said lower tube 204. The lower tube 204 is attached to transversal poles 104 of scaffold 101 by way of second fixing means 214 and 215. The upper tube 205 is attached to transversal poles 104 of scaffold 101 by way of first fixing means 216 and 217.

The upper tube 205 features an anchoring head 211 located at its lower extremity and protruding from the lower tube 204 through a slot implemented along at least part of the length of lower tube 204. Upper tube 205 also includes an internal strengthener component 222, the section of which can be square, triangular or dodecahedral. An external strengthener

WO 01/27411

PCT/GB00/03820

6

component 213 extends between the lower anchoring point 211 and an upper anchoring point 212 situated at the upper extremity of upper tube 205. A supporting cable 203 extends between said first substantially vertical support 201 and a second substantially vertical support 202.

5 Said substantially vertical support 202 has an identical structure to first substantially vertical support 201 in that it includes a lower tube 206 and an upper tube 207, the diameter of said lower tube 206 being larger than that of upper tube 207 so as to enable the upper tube 207 to slide vertically within lower tube 206. The upper tube 207 features an anchoring point 208 at its lower extremity and an anchoring point 209 situated at its upper extremity. Upper tube 207 also includes an internal strengthener component 223, the section of which can be square, triangular or dodecahedral. An external strengthening cable 210 extends between both anchoring points. The lower tube is attached to transversal poles of scaffold 101 by way of second fixing means 218 and 219 and upper tube 207 is attached to transversal poles of scaffold 101 by way of first fixing means 220 and 221.

Figure 3 provides a more detailed view of the anchoring means for the supporting cable 203 extending between said first and second supports.

20 Supporting cable 203 passes through a first clamping device 301 located on the anchoring point 211 which is itself located on the lower extremity of the upper tube 205 of the first substantially vertical support 201. The supporting cable 203 then passes through a second clamping device 302 identical in all points to clamping device 301. Clamping device 302 is rigidly attached to upper tube 205. Supporting cable 203 is then further supported by pulley 303 implemented at the upper extremity of upper tube 205, which translates the direction of the safety cable from a

WO 01/27411

PCT/GB00/03820

7

vertical direction to a horizontal direction. Supporting cable 203 then extends between said upper extremity of the upper tube 205 of the substantially vertical support 201 and the upper extremity of upper tube 207 of second substantially vertical support 202.

5       The second substantially vertical support 202 is identical in structure and components to the first substantially vertical support 201 but does not feature a first or a second clamping device. However, the upper tube 207 features attachment means 304 at its upper extremity in order to safely anchor the extremity of the supporting cable 203.

10       Figure 4 provides a more detailed view of the clamping devices implemented to secure the supporting cable 203 as well as the external strengthening cable 213. Anchoring point 211 is an integral part of upper tube 205 and protrudes from a slot 409 implemented along at least part of the length of lower tube 204. Clamping device 301 features an upper opening 401 through which supporting cable 203 enters the clamping device. It also features a lower opening 402 through which the cable exits the clamping device. The clamping operation is implemented by way of an anterior plate 403 against which supporting cable 203 is clamped by a posterior plate 404. The posterior plate 404 is pressed against the cable and the anterior plate 403 by way of a tightening screw and bolt combination 405.

20       The supporting cable 203 then passes through a second clamping device 302, which is identical in all points to the clamping device 301.

25       Supporting cable 203 is tensed once it has been threaded through clamping devices 301, 302 and safely anchored to anchoring point 209, and is clamped in place by tightening the screw and bolt combination 405. In effect, clamping device 302 provides the primary clamping point,

WO 01/27411

PCT/GB00/03820

8

whereas clamping device 301 assumes the function of a redundant, additional safety clamping point should the primary clamping device 302 fail.

Part of the anchoring point 211 protrudes and a cavity 410 is implemented at the extremity of this protuberance in order to facilitate the anchoring of the external strengthener component 213 to said anchoring point. Said external strengthener component 213 is attached to a first loop 406 that includes a threaded extremity, said threaded extremity is screwed to one end of a double-ended tightening loop 407, a hook 408 also including a threaded extremity is screwed to the other end of the double-ended tightening loop 407. The sharp end of said hook 408 is then passed through the cavity 410. Upon rotating the double-ended tightening loop 407, the tension of the external strengthening cable 213 is increased and therefore increases the overall rigidity and integrity of the upper tube 205.

*Figure 5* illustrates a perspective view of said first and second fixing means 214, 215, 216, 217, 218, 219, 220 and 221. Said fixing means comprise two cylindrical brackets 501 and 502, diametrically opposed such that bracket 501 is secured around substantially vertical support 201 and bracket 502 is secured around any pole forming part of scaffold 101, preferably a transversal pole, such as transversal pole 104. Said bracket 501 comprises a first half cylinder 503 and a second half cylinder 504 articulated by a hinge 505. Said half cylinders 503 and 504 may be clasped together by way of locking means 506.

The half cylinder 503 features an inner plate 507 with a permanent layer of PTFE material implemented to confer the apparatus increased grip over the substantially vertical support. The second half cylinder 504 which faces the outside of said substantially vertical support features three



WO 01/27411

PCT/GB00/03820

9

threaded holes 508, 509 and 510, preferably equidistant from one another and implemented on an imaginary line dividing the half cylinder 504 along the sense of its curve. Screw devices 511, 512 and 513 have a thread that compliments the thread implemented in openings 508, 509 and 510. An  
5 internal plate 514 with a curvature sensibly similar to the curve defined by the half cylinder 504 is pressed against said substantially vertical support by way of screwing and thereby tightening screw device 511 into opening 508, screw device 512 through opening 509 and screw device 513 through opening 510, at which point they apply pressure against the curved plate  
10 514, which itself clasps said substantially vertical support against plate 507.

Said bracket 501 is mounted by way of welding, or other appropriate process, to an extension arm 515, the section of which is substantially but non-exclusively circular. Said extension arm 515 is itself mounted onto a base square plate 516 by way of welding, or any other appropriate means.  
15 Said base square plate 516 has threaded holes 517 implemented at each of its four corners.

An additional bracket 502, identical in all points to first bracket 501, is fixed to bracket 501 by bolting together their respective base square plates 516 and 518 through the four threaded openings 517 on square  
20 plate 516 and corresponding threaded openings 519 on square base plate 518. Said bracket 502 is fixed to bracket 501 in such a way that the cylinders respectively delimited by brackets 501 and 502 are perpendicular to one another. Thus, we have described fixing means of the type referred to in Figure 2 as 214, 215, 216, 217, 218, 219, 220 and 221, which enable  
25 the safe anchoring of the ensemble of the substantially vertical supports to transversal poles, which are a strengthening part of scaffold 101 themselves.

WO 01/27411

PCT/GB00/03820

10

Figure 6 shows an implementation of a system of pulleys and rope combination, which is used to slide upper tube 205 independently of lower tube 204. Said system comprises a first ensemble of pulleys 601, rigidly fixed to lower tube 204 of first substantially vertical support 201. Said system also comprise a second ensemble of pulleys 602, itself rigidly fixed to upper tube 205 of first substantially vertical support 201. A rope 603 passes through both ensembles of pulleys 601 on lower tube 204 and 602 on upper tube 205 and is threaded through said ensemble of pulleys in such a way that pulling on said rope 603 would raise upper tube 205 independently of lower tube 204 and feeding the rope through the ensemble of pulleys would, on the contrary, lower upper tube 205 within lower tube 204. Alternatively, should rope 603 be manoeuvred above the lower tube 204, the effect of pulling rope 603 through the ensemble of pulleys 601, 602 would raise the lower tube 204 independently of upper tube 205 and feeding said rope 603 through the ensemble of pulleys 601, 602 would lower lower tube 204 independently of upper tube 205.

The second substantially vertical support 202 is equipped with an identical system of pulleys and rope combination, in order to adjust the height of both substantially vertical supports 201 and 202 such that the supporting cable 203 remains parallel to the structure and is attached at all times.

Figure 7 shows the first erected level of a scaffold 701, which typically does not yet require scaffolders to equip themselves with any safety device, said structure being typically under six foot high.

Said scaffold comprises a combination of vertical poles 715 and horizontal poles 716 and four transversal poles 703, 704, 705 and 706. It further comprises flat surface 702, typically wooden planks resting on the

WO 01/27411

PCT/GB00/03820

11

ensemble delimited by the poles so that scaffolders, fitters or builders, can manoeuvre and carry out their working tasks on the scaffold. The safety apparatus is implemented at this stage of the erection of the structure.

The safety apparatus comprises a first substantially vertical support  
s 201, itself comprising a lower tube 204 and an upper tube 205, said lower tube 204 having a bigger diameter than said upper tube 205, so as to allow upper tube 205 to slide vertically within lower tube 204.

The safety apparatus also comprises a second substantially vertical support 202 of a structure similar to first substantially vertical support 201 in  
10 that it includes a lower tube 206 and an upper tube 207, said lower tube 206 having a larger diameter than upper tube 207, so as to allow upper tube 207 to slide vertically within lower tube 206.

A safety cable 203 extends between first substantially vertical support 201, which is attached to scaffolding 701 by way of second fixing means 214 and 215 respectively bracketing transversal poles 703 and 704,  
15 and second substantially vertical support 202, which is attached to scaffolding 701 by way of second fixing means 218 and 219, respectively bracketing transversal poles 705 and 706.

Said safety apparatus is implemented at this stage of the erection of  
20 the structure to enable scaffolders to attach their respective safety harnesses to the apparatus whilst still being on the ground, thereby benefiting from the safety conferred by the apparatus as soon as the scaffolders start escalating said structure.

A scaffolder 707 equipped with a safety harness 709 is depicted as  
25 stood on flat surface 702. He is tethered to safety cable 203 by way of a cable 711 attached to a cable clamping device 713, preferably of the type known as inertia reel. Another scaffolder 708, equipped with a safety

FOOTED " 936550

WO 01/27411

PCT/GB00/03820

12

harness 710 is tethered to safety cable 203 by way of a cable 712 attached to a cable clamping device 714, also preferably of the type known as inertia reel, is depicted still on the ground.

Safety cable clamping devices 713 and 714 are preferably of the type known as inertia reel for the purpose of enabling a scaffolder 708 to secure his harness 710 to the safety cable 203 whilst still on the ground before climbing onto the scaffold 701 and putting himself at risk of subsequently falling from a high elevation.

Said inertia reel is well known to those skilled in the art and is designed to function along the same principle as a car safety belt. It will allow an attachment cable to unreel in the case of a scaffolder escalating or descending from a structure such as a scaffold, but it will prevent the cable from unreeling in the case of an abrupt cable tension such as may arise in an accidental fall from said structure.

Thus, before erecting the safety apparatus, handlers will ensure that the respective leads of the attachment cables of said inertia reels 713 and 714 are secured to any anchoring means on the ground, so that, upon completing the setting up of the safety apparatus, scaffolder 708 can safely attach the lead of inertia reel 714 to his safety harness 710 and scale scaffold 701 to reach the position of scaffolder 707 in total safety.

The safety cable 203 must always stand above the head of the scaffolders. Therefore, as the structure is being erected, the height of safety cable 203 relative to the height of the scaffolders at work will subsequently have to be adjusted. Figure 8 details the steps required to adjust the height of said safety cable appropriately.

At step 801 it is determined that a new, higher level of structure requires erecting. At step 802 the question is asked as to whether the

09857867-091001  
TOP SECRET

WO 01/27411

PCT/GB00/03820

13

safety cable and therefore the safety apparatus in its ensemble is high enough to remain above the head of the scaffolders and thereby provide safety once the new, higher level has been erected. If answered in the affirmative, said new higher level can be built at step 810 without proceeding with any further adjustments of the safety apparatus. However, if answered in the negative, the safety apparatus requires adjustment so that said safety cable will still be above the head of the scaffolder once the new higher level has been erected.

At step 803 the first fixing means 216 and 217 are released so as to enable upper tube 205 of first substantially vertical support 201 to slide vertically within lower tube 204 by way of the system of pulleys and rope combination 601, 602, 603 until such time as it reaches an appropriate height at step 804. At step 805 the first fixing means 216 and 217 are then re-fixed to the structure and secured again. This three-step procedure is repeated with the first fixing means 220 and 221 of upper tube 207 of second substantially vertical support 202.

At step 806 a question is asked as to whether the safety cable is now high enough after the adjustment has taken place for the work to be carried out. When answered in the affirmative the new higher level of the structure can be erected as at step 810. However, should safety cable 203 and the safety apparatus still not reach the required height, for instance if the maximum elevation of the safety apparatus stood on the ground has been reached, then at step 807 the second fixing means 214 and 215 are released so as to enable lower tube 204 of first substantially vertical support 201 to slide vertically over upper tube 205 by way of the system of pulleys and rope combination 601, 602, 603 until such time as it reaches an appropriate height at step 808. At step 806 the second fixing means 214

WO 01/27411

PCT/GB00/03820

14

and 215 are then re-fixed to the structure and secured again. This three-step procedure is repeated with the second fixing means 218 and 219 of lower tube 206 of second substantially vertical support 202. At which point the operation reverts back to step 803 where the first fixing means, located on the upper tubes are released, the upper tubes can slide upwards to achieve the required height and the first fixing means are secured in place. Thus, the appropriate height for the safety apparatus is now achieved and the new higher level of the structure can be erected.

Throughout the course of the adjustment that has been described, the scaffolders carrying out this adjustment and erecting said structure still benefit from a safe tethering to safety cable 203 that will prevent any accidental fall from said structure.

Figure 9 shows a scaffold 701 from Figure 7 where an additional higher level of scaffold has been implemented by way of vertical poles 901, horizontal poles 902, transversal poles 903 and 904 and flat surface 904. At this stage, the height of the scaffold does not yet require upper tubes 205 and 207 to be attached to the structure. The height of the safety cable 203 has however been adjusted with regard to its respective heights as depicted in Figure 7 and said adjustment has been carried out by way of a system of pulleys and rope combination 601, 602, 603. Additionally, further integrity has been provided to the safety apparatus by releasing second fixing means 215 and 219 from their anchoring to transversal poles 704 and 706 respectively, and re-anchoring to new, higher transversal poles 903 and 904.

Scaffolder 707 has been able to carry out all the aforementioned adjustments in total safety. Moreover, scaffolder 708 is still able to anchor his harness 710 to safety cable 203 by attaching the lead of attachment

WO 01/27411

PCT/GB00/03820

15

cable 712 on inertia reel 714 whilst still on the ground.

5 *Figure 10* again shows a scaffold 701 from *Figures 7* and *9*, where an additional higher level of scaffold has been implemented by way of vertical poles 1001, horizontal poles 1002, transversal poles 1003, 1004, 1005, 1006, 1008 and 1009 and flat surface 1007. At this stage, the height of the scaffold does require upper tubes 205 and 207 to be attached to the structure, by attaching first fixing means 216 and 217 to transversal poles 1003 and 1004 respectively, and attaching first fixing means 220 and 221 to transversal poles 1005 and 1006 respectively. The height of the safety cable 203 has initially been adjusted with regard to its respective heights as depicted in *Figures 7* and *9* and said adjustment has been carried out by way of a system of pulleys and rope combination 601, 602, 603. The safety apparatus is here depicted as having reached its maximum extension, which reaches generally between five and ten meters, preferably reaches 10  
15 seven meters.

Scaffolder 707 has been able to carry out all the aforementioned adjustments in total safety. Moreover, scaffolder 708 is still able to anchor his harness 710 to safety cable 203 by attaching the lead of attachment cable 712 on inertia reel 714 whilst still on the ground.

20 *Figure 11* again shows a scaffold 701 from *Figures 7*, *9* and *10*, where additional higher levels of scaffold have been implemented by way of vertical poles 1101, horizontal poles 1102, transversal poles 1103, 1104, 1105 and 1106 and flat surfaces 1107 and 1108. At this stage, the height of the scaffold has required the length of the safety apparatus to be adjusted such that supporting cable 203 is elevated to a height beyond the maximum elevation of said safety apparatus whilst the lower extremities of the 25  
respective lower tubes of its two substantially vertical supports rest on the

WO 01/27411

PCT/GB90/03820

16

ground. Steps 801 to 810 have therefore been followed and, in order to arrive at the situation represented in *Figure 11*, the following actions have successively taken place:

In order erect further levels of scaffold 701 it is determined that the safety cable will not be high enough after the adjustment as at step 806, since the safety apparatus has already reached its maximum extension. The second fixing means 214 and 215 are therefore released from the transversal poles 706 and 903 respectively. Alternatively, first fixing means 216 may also be released from transversal pole 1003 in order to slide lower tube 204 further up than what would be the case if this particular first fixing means was left in place. Lower tube 204 then slides upwards along the length of upper tube 205 by way of the system of pulleys and rope combination 601, 602 and 603. Second fixing means 214 and 215 are then respectively re-fixed to transversal poles 1003 and 1008. The above operation is then repeated for the second substantially vertical support, the second fixing means 218 and 219 of which are released from the transversal poles 705 and 904 respectively. Alternatively, first fixing means 220 may also be released from transversal pole 1005 in order to provide more clearance to slide lower tube 206 further up along the length of upper tube 207. Said lower tube 206 then slides along in an upward direction along the length of upper tube 207. Second fixing means 218 and 219 are then respectively secured to transversal poles 1005 and 1009.

Subsequently, first fixing means 217 is released from transversal pole 1004 and the length of the safety apparatus is adjusted by way of the system of pulleys and rope 601, 602 and 603. Similarly, first fixing means 221 is released from transversal pole 1006 and the length of the second substantially vertical support is likewise adjusted so that supporting cable



WO 01/27411

PCT/GB00/03820

17

203 reaches an appropriate height above the head of the scaffolders.

A new level of structure delimited by flat surface 1107 can now be erected. Upon erection of this level the length of the safety apparatus is again adjusted by way of the system of pulleys and rope combination 601, 602 and 603. Upon completing this adjustment a new higher level of scaffold 701 which is delimited by flat surface 1108 can now be erected.

Upon completion of the assembly of this new higher level, first fixing means 216 and 217 of upper tube 205 can now be attached to transversal poles 1103 and 1104 respectively. Likewise, first fixing means 220 and 221 of upper tube 207 can now be attached to transversal pole 1105 and 1106 respectively.

Thus, we have now described a method of erecting safety apparatus during the assembly of a structure which comprise the steps of attaching a first substantially vertical support 201 to said structure, to attach the second substantially vertical support 202 to said structure, to extend a supporting cable 203 between said first and second substantially vertical supports 201, 202 and attach a safety harness 709 or 710 to said supporting cable 203, wherein said vertical support 201, 202 are configured to be adjustable in length and each includes a first fixing means 216, 217, 220, 221 and a second fixing means 214, 215, 218, 219, such that the length of a support may be adjusted by releasing said fixing means and then re-fixing said fixing means after said adjustment as according to steps 801 to 810.

In a preferred embodiment of the present invention, substantial vertical support 201 is equipped with spring-loaded supporting foot 1109. Said supporting foot 1109 is implemented at the lower extremity of lower tube 204 of said substantially vertical support 201. It is configured to confer additional stability to safety apparatus in its ensemble, by way of

transferring part of the weight of the safety apparatus in its ensemble to the lowest transversal pole 104 the base of said spring-loaded supporting foot is resting on.

As most of the total weight of the safety apparatus is in its ensemble  
 5 it is supported by first and second fixing means of each substantially  
 vertical supports 201 and 202, upon performing the length adjustment in  
 order for supporting cable 203 to be adjusted to an appropriate height, said  
 spring-loaded supporting foot 1109 then rotates downward as it comes into  
 contact with the underside of the next, higher transversal pole, then slide  
 10 along the external diameter of said pole in a sensibly vertical direction.  
 Upon the extremity of said spring-loaded supporting foot 1109 having slid  
 along the full external diameter of said next higher transversal pole, said  
 extremity being now situated above next higher transversal pole, said  
 spring action derived from the spring-loaded characteristic of said  
 15 supporting foot actuate the rotation of said supporting foot back to a  
 position sensibly perpendicular to substantially vertical support 201 and  
 parallel to supporting cable 203. Said spring-loaded supporting foot 1109  
 can then support part of the weight of safety apparatus in its ensemble on  
 said next, higher transversal pole. A spring-loaded foot 1110, identical in  
 20 configuration, characteristics and function to spring-loaded supporting foot  
 1109, is implemented at the lower extremity of lower tube 206 of  
 substantially vertical support 202, such that both substantially vertical  
 supports 201, 202 are evenly supported in this way.

An alternative embodiment of the present invention exists wherein  
 25 the lower and upper tube configuration of each said substantially vertical  
 support remain identical in all points, however the upper extremities of  
 upper tube 205 and 207 are configured to accommodate multiple

09857867-091001

WO 01/27411

PCT/GB00/03820

19

supporting cables.

For example, *Figure 12* illustrates the implementation of a second supporting cable 1201, which has been implemented between the first vertical support 201 and the second vertical support 202.

5 Upper extremity 209 of upper tube 207 features two sensibly parallel attachment means 304, wherein one attachment means provides safe anchoring for supporting cable 203 and the second attachment means, sensibly parallel to first attachment means 304, provides safe anchoring for second supporting cable 1201. Said supporting cables 304 and 1201 can  
10 be clamped by clamping devices 301 and 302.

Moreover, said clamping devices 301, 302, the components of which are described in detail in *Figure 4*, can be adapted to accommodate multiple cables 203, 1201 by implementing as many individual ensembles of components necessary to the clamping of said cables as there are  
15 supporting cables. Said multiple ensembles of clamping device components are sensibly parallel to one another and implemented side-by-side on the upper tube.

The benefit of this alternative embodiment of the invention is to enable scaffolders or builders working on a same flat surface of a structure  
20 to cross one another's path without incurring the risk of entangling the cable attachment of their respective inertia reel and thereby unreeling said cable attachment further which, in the case of an accidental fall, would increase the pendulum effect affecting said falling scaffolder.

"09857857" 091001  
"00160" 29825860

WO 01/27411

PCT/GB00/03820

20

**Claims**

1. Safety apparatus for the erection of structures, comprising  
a first substantially vertical support;  
5 a second substantially vertical support; and  
a supporting cable extending between said first and second  
supports, wherein  
said vertical supports are configured to be adjustable in length and  
each includes a first fixing means and a second fixing means such that the  
10 length of a support may be adjusted by releasing said first fixing means and  
then re-fixing said first fixing means after said adjustment has been made.
2. Apparatus according to claim 1, wherein said substantial  
vertical supports are made of a highly tensile material.
- 15 3. Apparatus according to claims 1 and 2, wherein said  
substantial vertical supports comprise an upper and a lower tube.
4. Apparatus according to claims 1 to 3, wherein said upper  
20 tubes of substantially vertical supports are equipped with an internal and an  
external strengthening component.
5. Apparatus according to claim 4, wherein said external  
strengthening component is a steel cable, the tension of which is  
25 adjustable.
6. Apparatus according to claims 1 to 4, wherein the diameter of

WO 01/27411

PCT/GB00/03820

21

said lower tube is different from the diameter of said upper tube so that said upper and lower tubes can slide vertically independently of one another.

6 7. Apparatus according to claim 1 wherein first and second fixing means are of the type described in Figure 5.

8. Safety apparatus for the erection of structures, comprising  
a first substantially vertical support;  
a second substantially vertical support; and  
10 multiple supporting cables extending between said first and second supports, wherein

said vertical supports are configured to be adjustable in length and each includes a first fixing means and a second fixing means such that the length of a support may be adjusted by releasing said first fixing means and  
15 then re-fixing said first fixing means after said adjustment has been made.

9. Apparatus according to claim 1 or 8 wherein said supporting cable is made of a highly tensile material.

20 10. Apparatus according to claim 1 or 9 wherein the tension of said supporting cable is adjustable by cable-clamping devices implemented on said substantially vertical supports.

25 11. Method of erecting safety apparatus during the assembly of a structure, comprising the steps of  
attaching the first substantially vertical support to said structure;  
attaching the second substantially vertical support to said structure;

WO 01/27411

PCT/GB00/03820

22

extending a cable between said first and second supports and  
attaching a safety harness to said cable, wherein

said vertical supports are configured to be adjustable in length and  
each includes a first fixing means and a second fixing means such that the  
5 length of a support may be adjusted by releasing said first fixing means and  
then re-fixing said fixing means after said adjustment.

12. A method according to claim 11, wherein said substantial  
vertical supports are made of a highly tensile material.

13. A method according to claims 11 and 12, wherein said  
substantial vertical supports comprise an upper and a lower tube.

14. A method according to claims 11 to 13, wherein said upper  
15 tubes of substantially vertical supports are equipped with an internal and an  
external strengthening component.

15. A method according to claim 14, wherein said external  
strengthening component is a steel cable, the tension of which is  
20 adjustable.

16. A method according to claims 11 to 14, wherein the diameter  
of said lower tube is different from the diameter of said upper tube so that  
said upper and lower tubes can slide vertically independently of one  
25 another.

17. A method according to claim 11 wherein fixing means are of

00857857.001001

WO 01/27411

PCT/CB00/03820

23

the type described in *Figure 5*.

18. Method of erecting safety apparatus during the assembly of a structure, comprising the steps of

5        attaching the first substantially vertical support to said structure;  
      attaching the second substantially vertical support to said structure;  
      extending multiple cables between said first and second supports  
and

      attaching a safety harness to said cables, wherein  
10        said vertical supports are configured to be adjustable in length and  
      each includes a first fixing means and a second fixing means such that the  
      length of a support may be adjusted by releasing said first fixing means and  
      then re-fixing said fixing means after said adjustment.

15        19. A method according to claim 11 or 18 wherein said supporting  
      cable is made of a highly tensile material.

      20. A method according to claim 11 or 19 wherein the tension of  
      said supporting cable is adjustable by cable-clamping devices implemented  
20        on said substantially vertical supports.

T.007.60 2987.5860

WO 01/27411

PCT/GB00/03820

09/857867

1/12

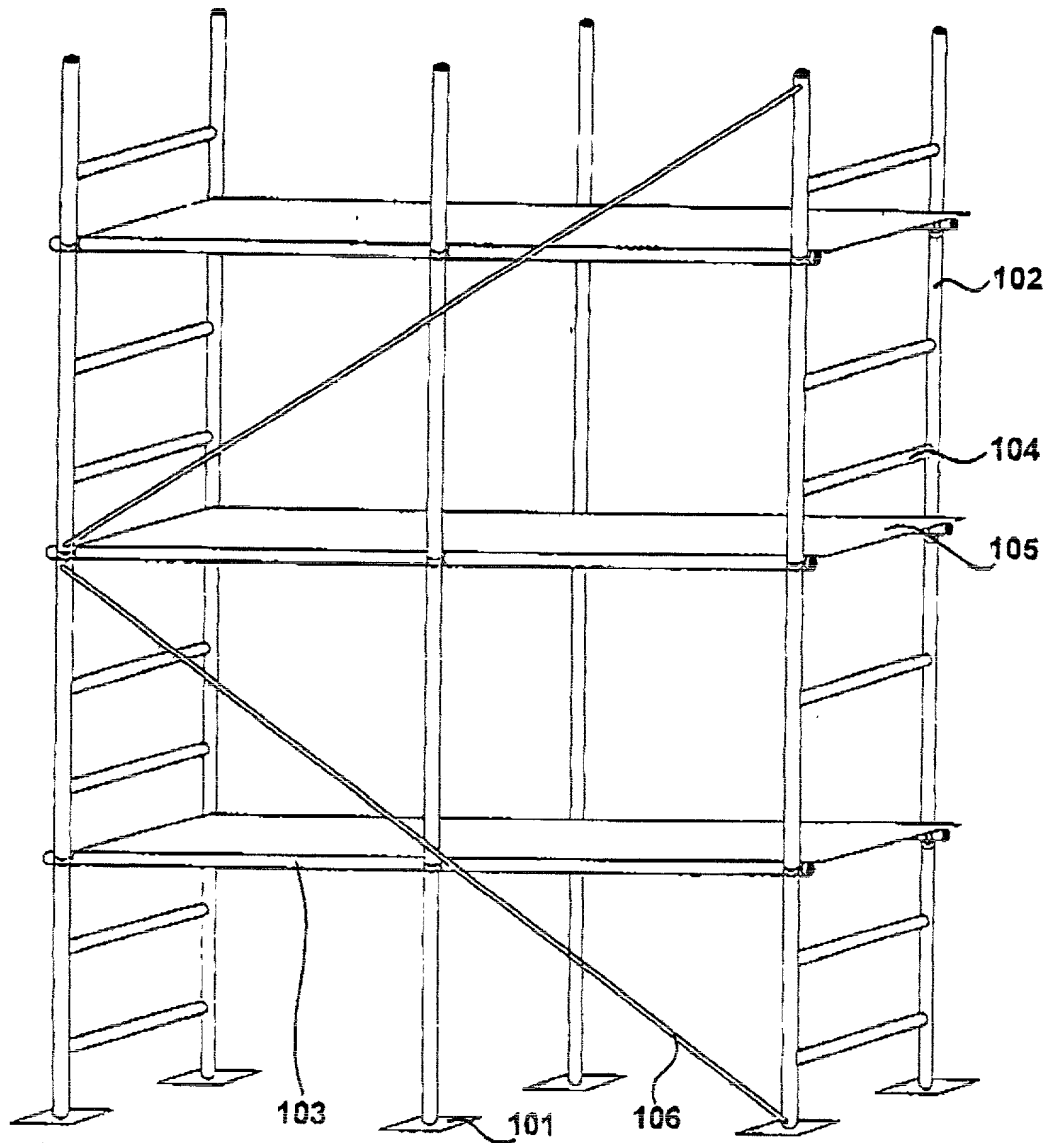


Figure 1



WO 01/27411

PCT/GB00/03820

09/857867

2/12

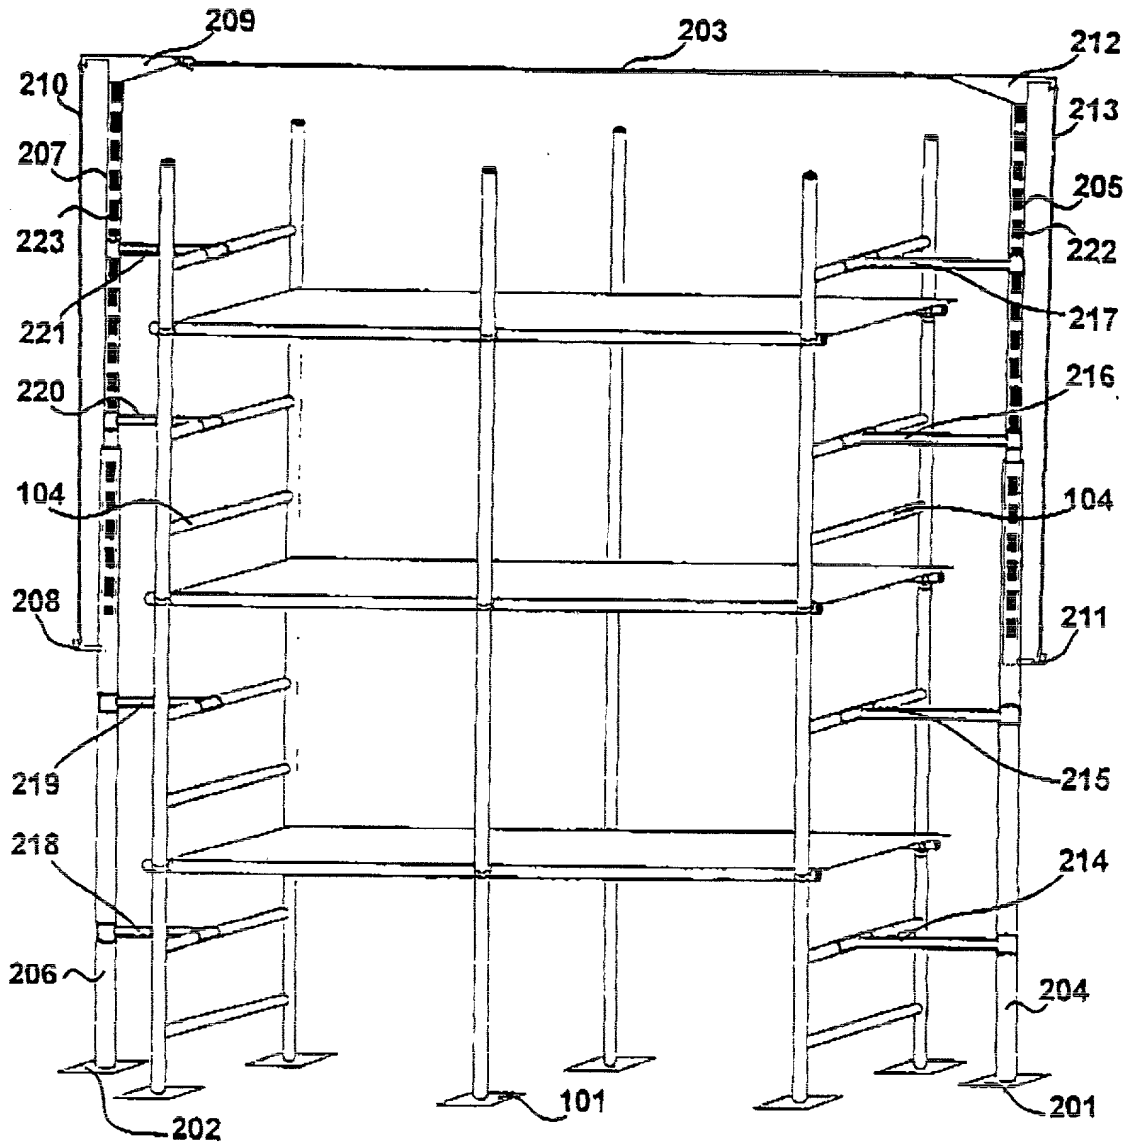


Figure 2

WO 01/27411

PCT/GB00/03820

3/12

09/857867

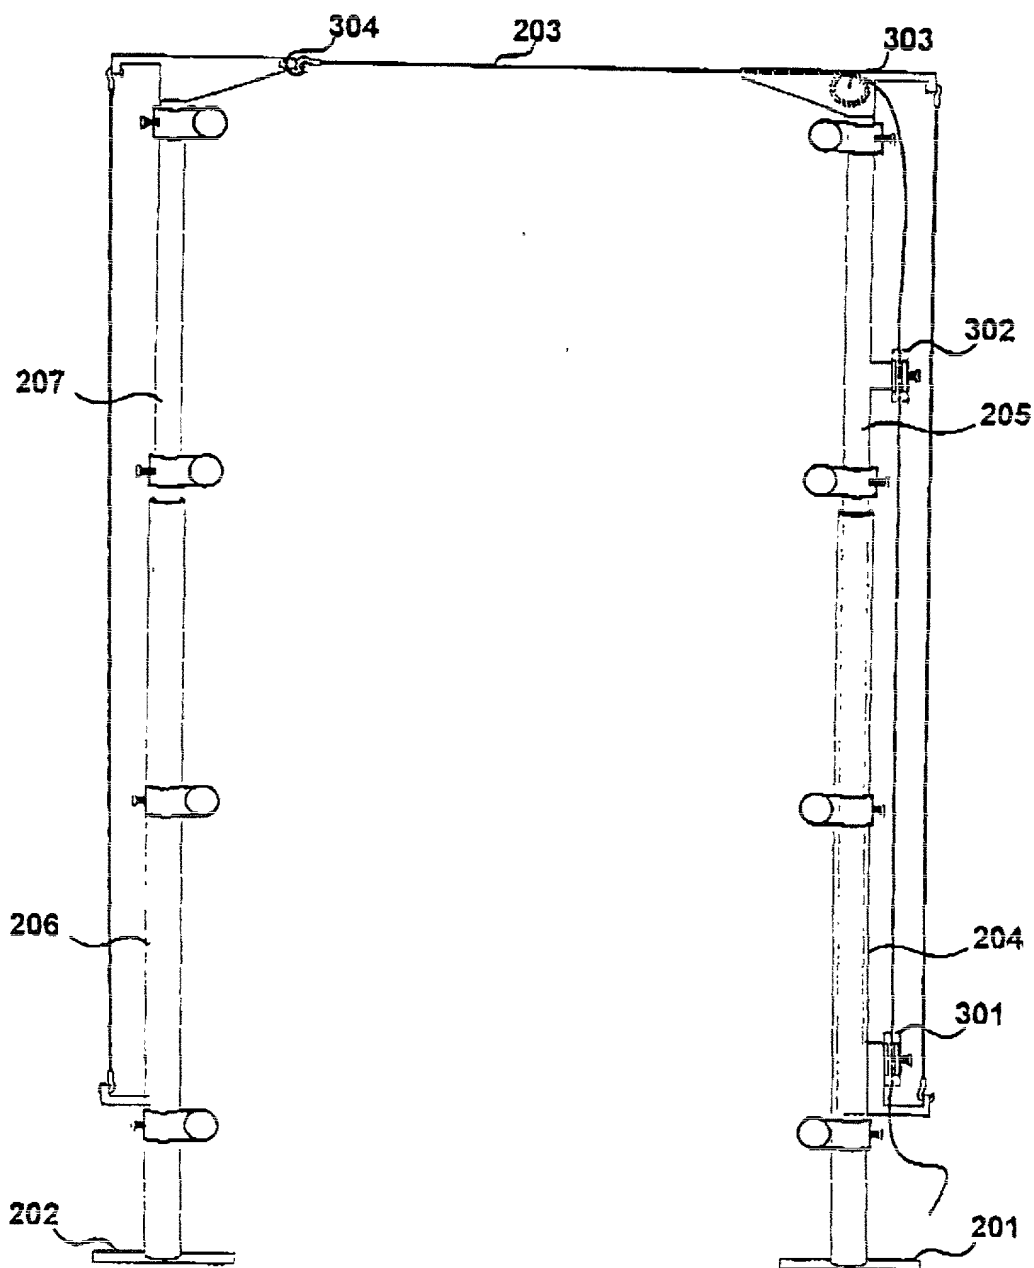


Figure 3

WO 01/27411

PCT/GB00/03820

4/12

09/857867

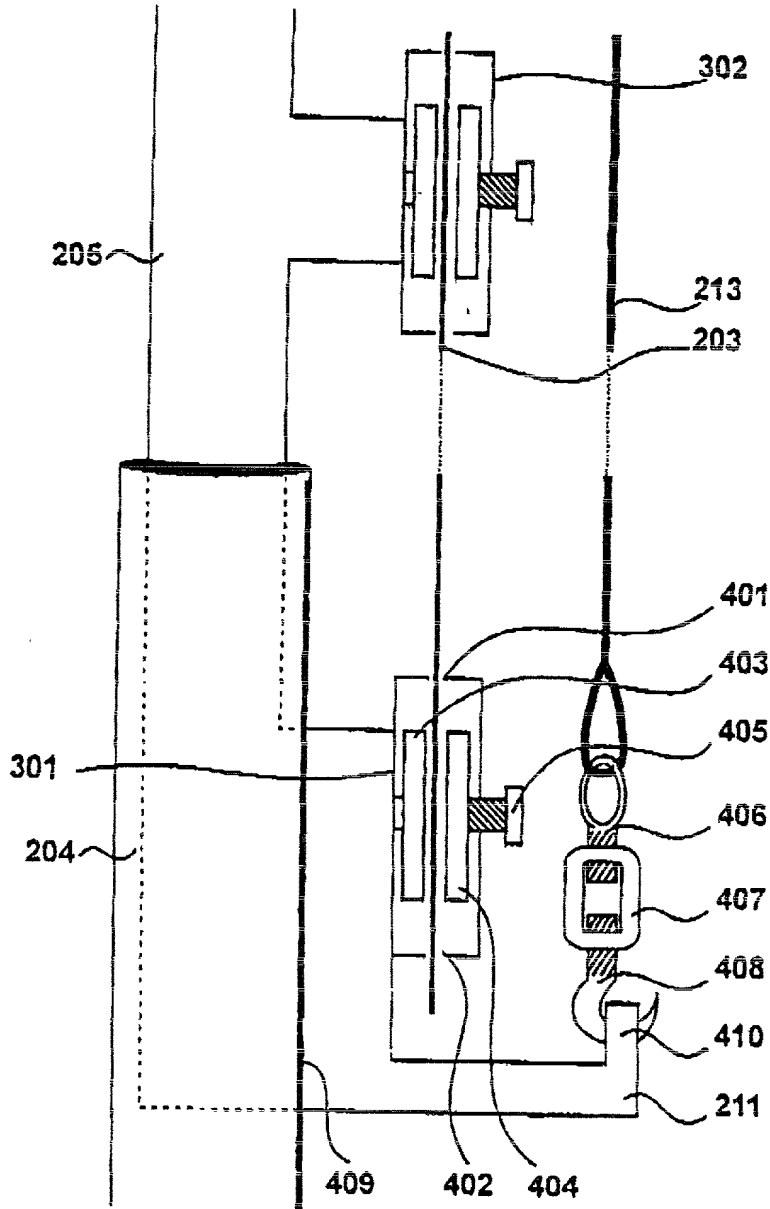


Figure 4

WO 01/27411

PCT/GB00/03820

09/857867

5/12

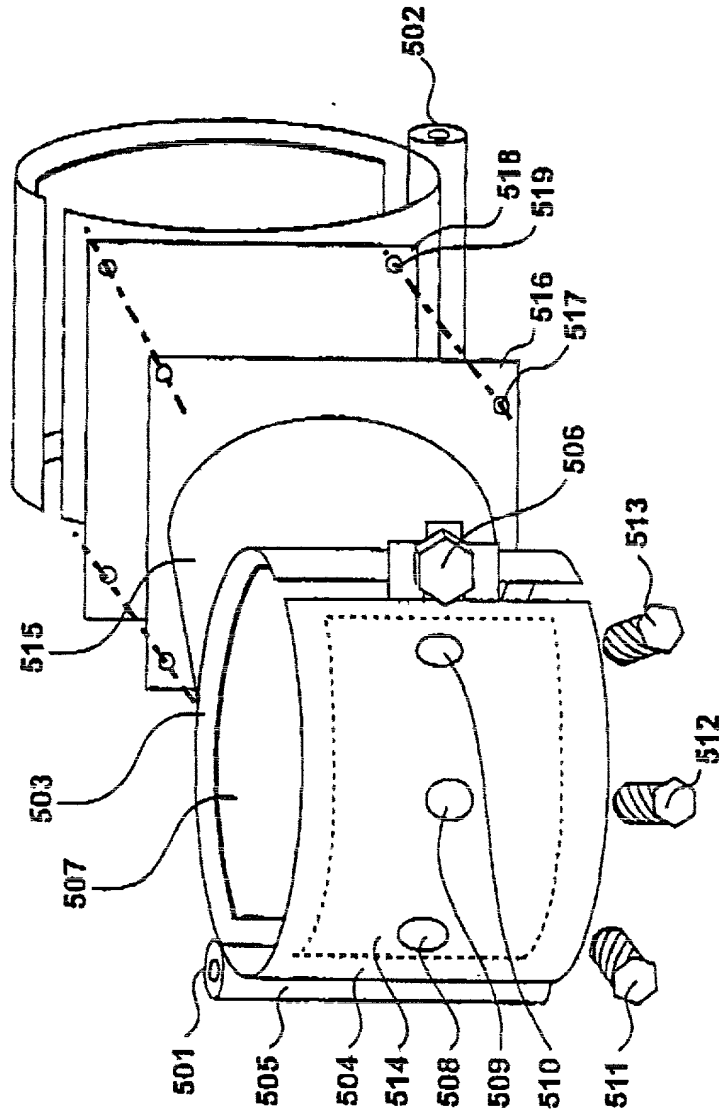


Figure 5

WO 01/27411

PCT/GB00/03820

097857867

6/12

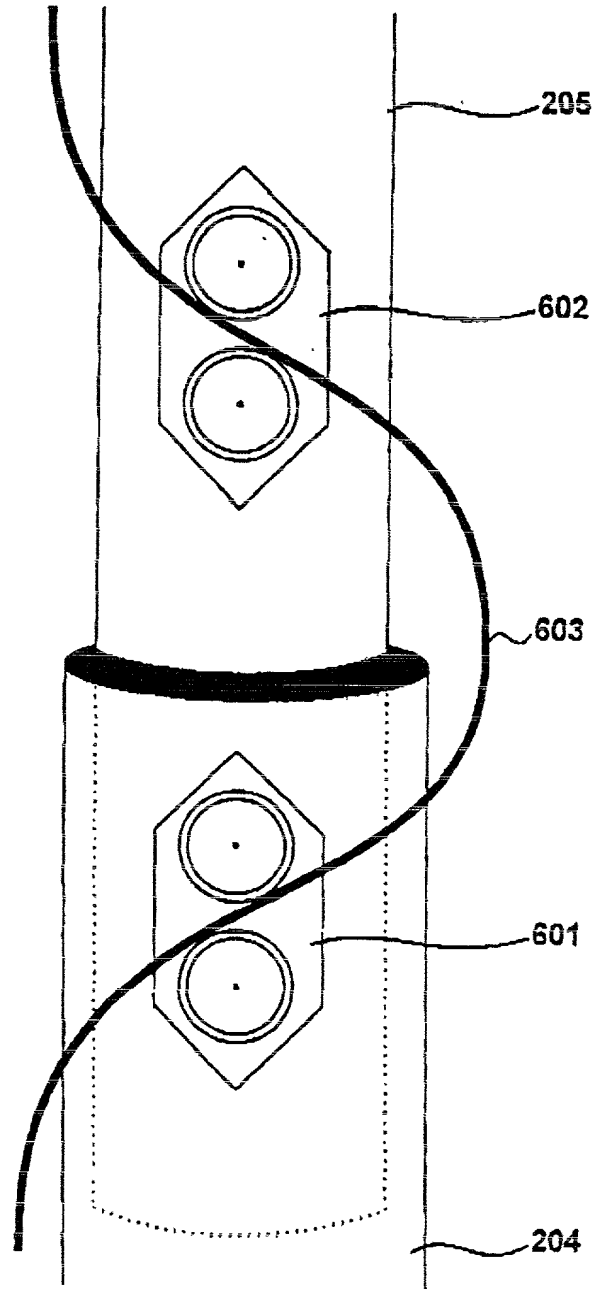


Figure 6

097857867 097857867

WO 01/27411

PCT/GB00/03820

7/12

69/ 857867

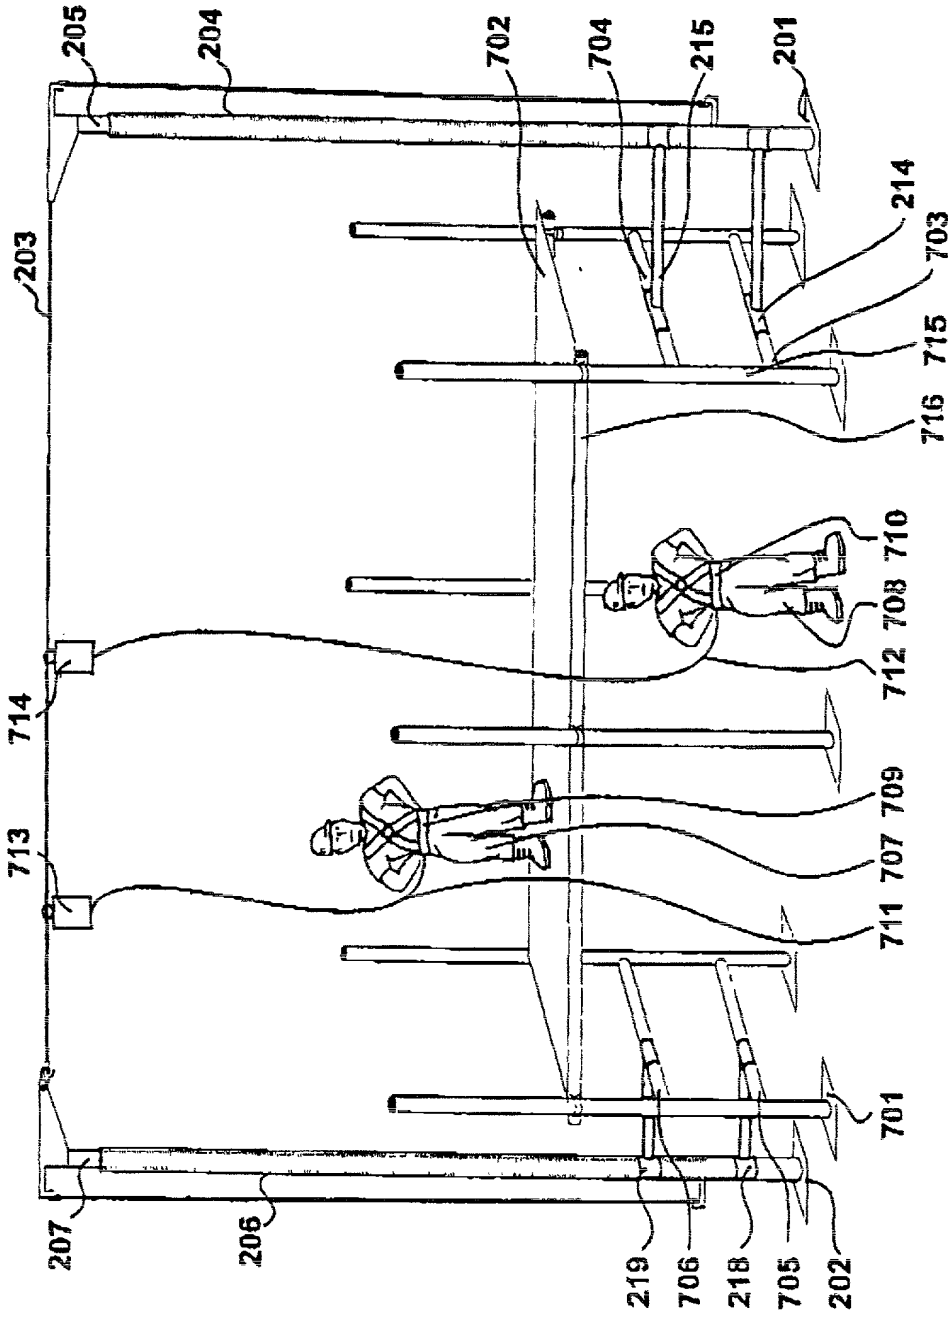


Figure 7

WO 01/27411

PCT/GB00/03820

09/857867

8/12

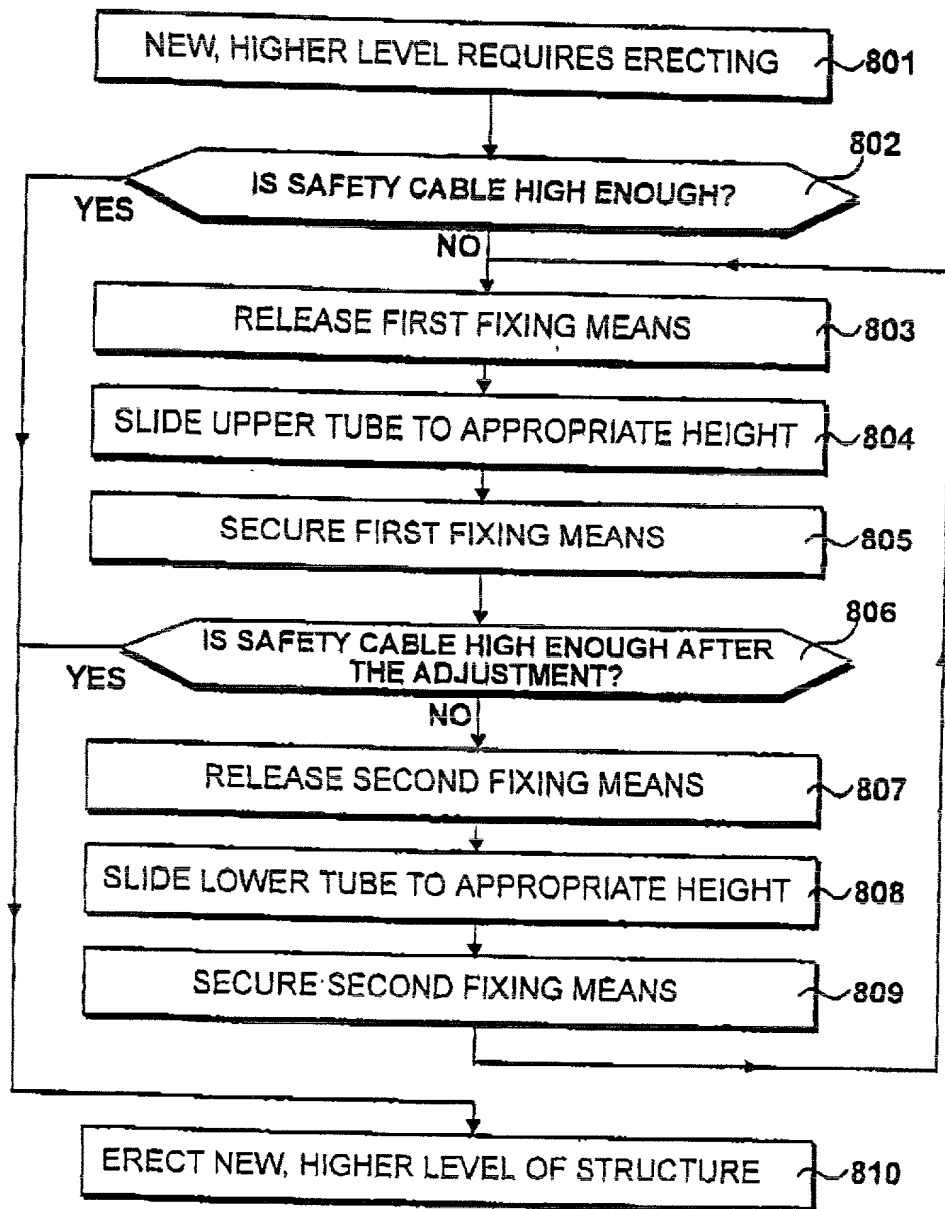


Figure 8

WO 01/27411

PCT/GB00/03820

9/12

09/857867

FIGURE 9

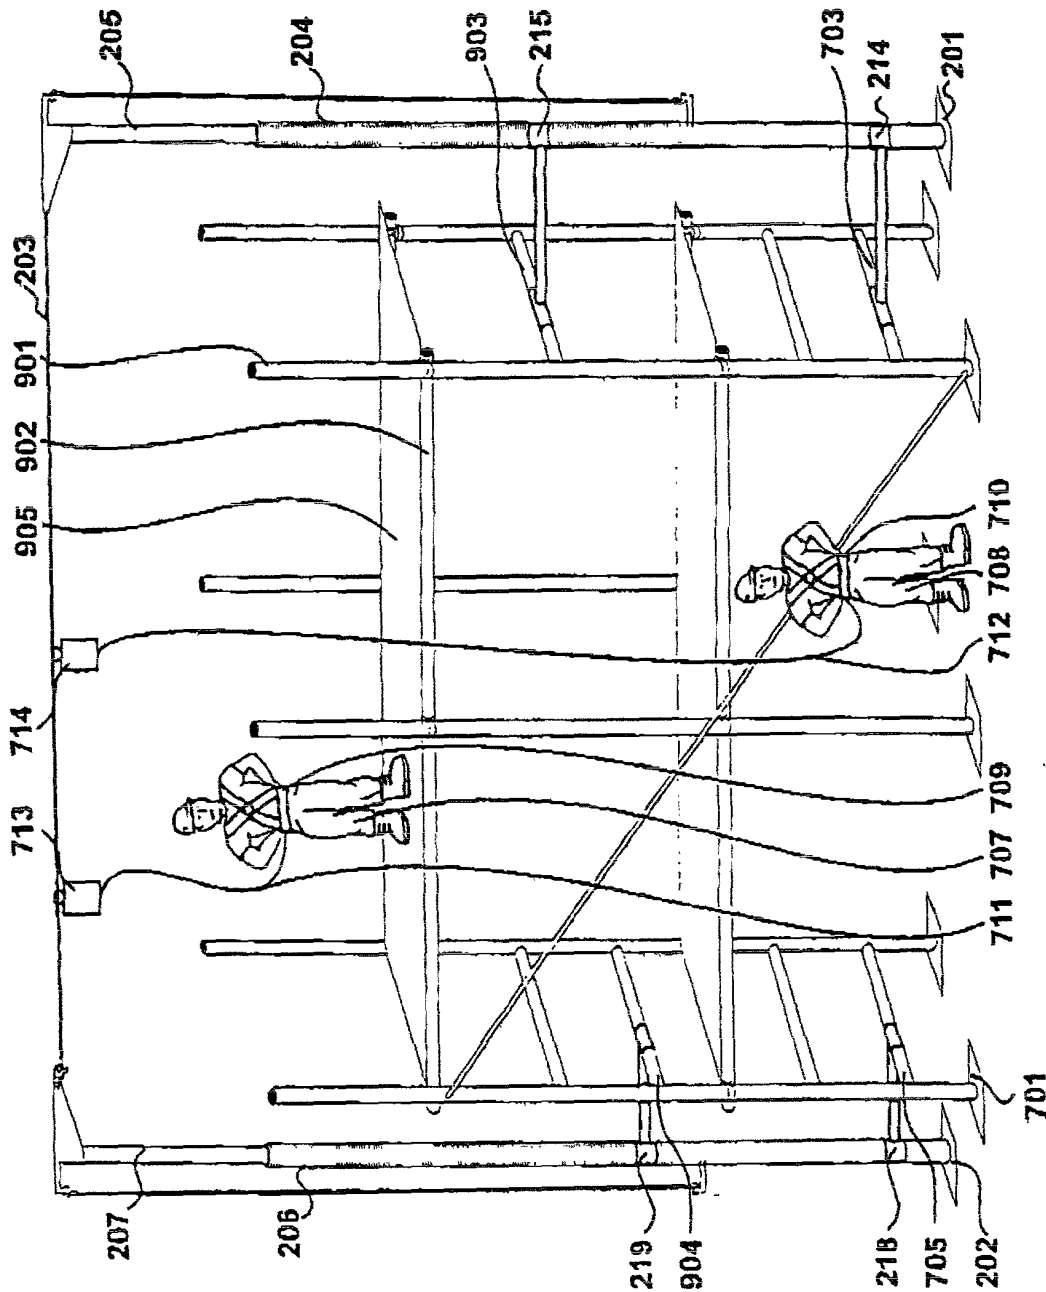


Figure 9



WO 01/27411

PCT/GB00/03820

10/12

09/857867

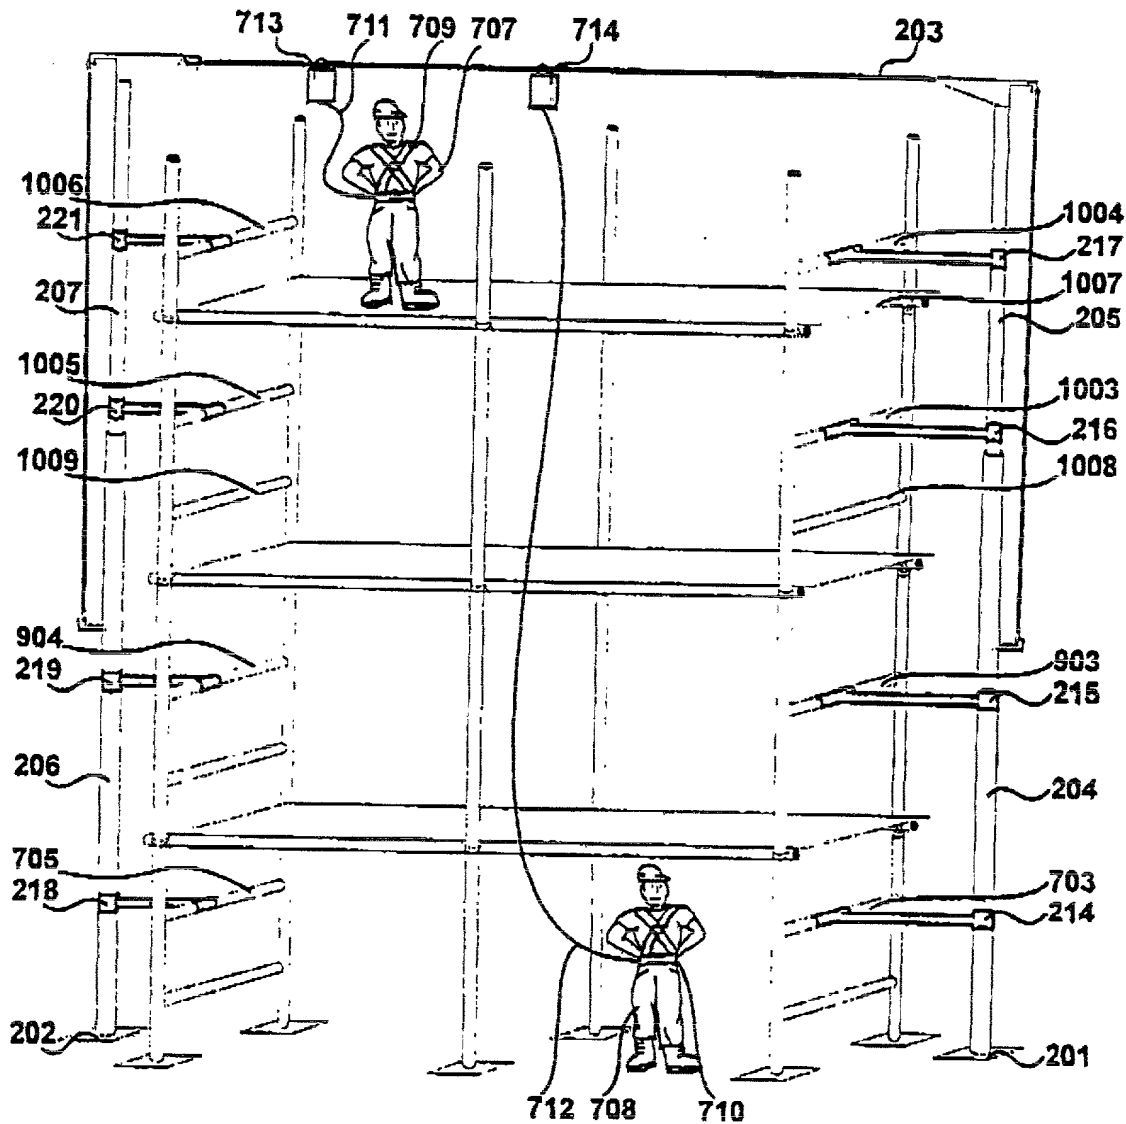


Figure 10

WO 01/27411

PCT/GB00/03820

11/12

09/857867

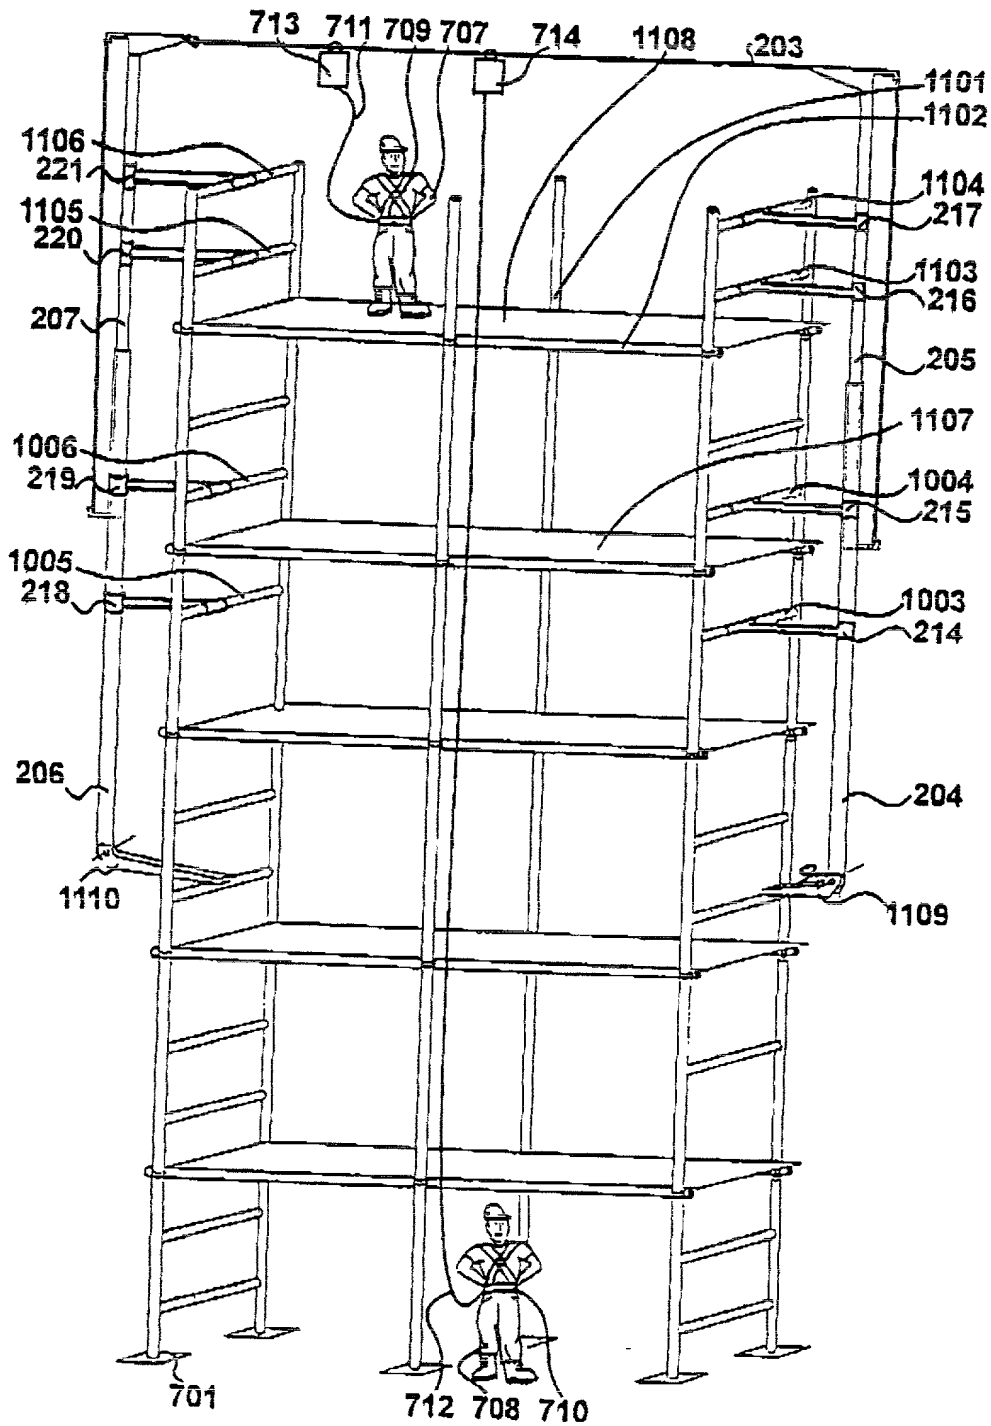


Figure 11

09/857867

WO 01/27411

PCT/GB00/03820

12/12

09/857867

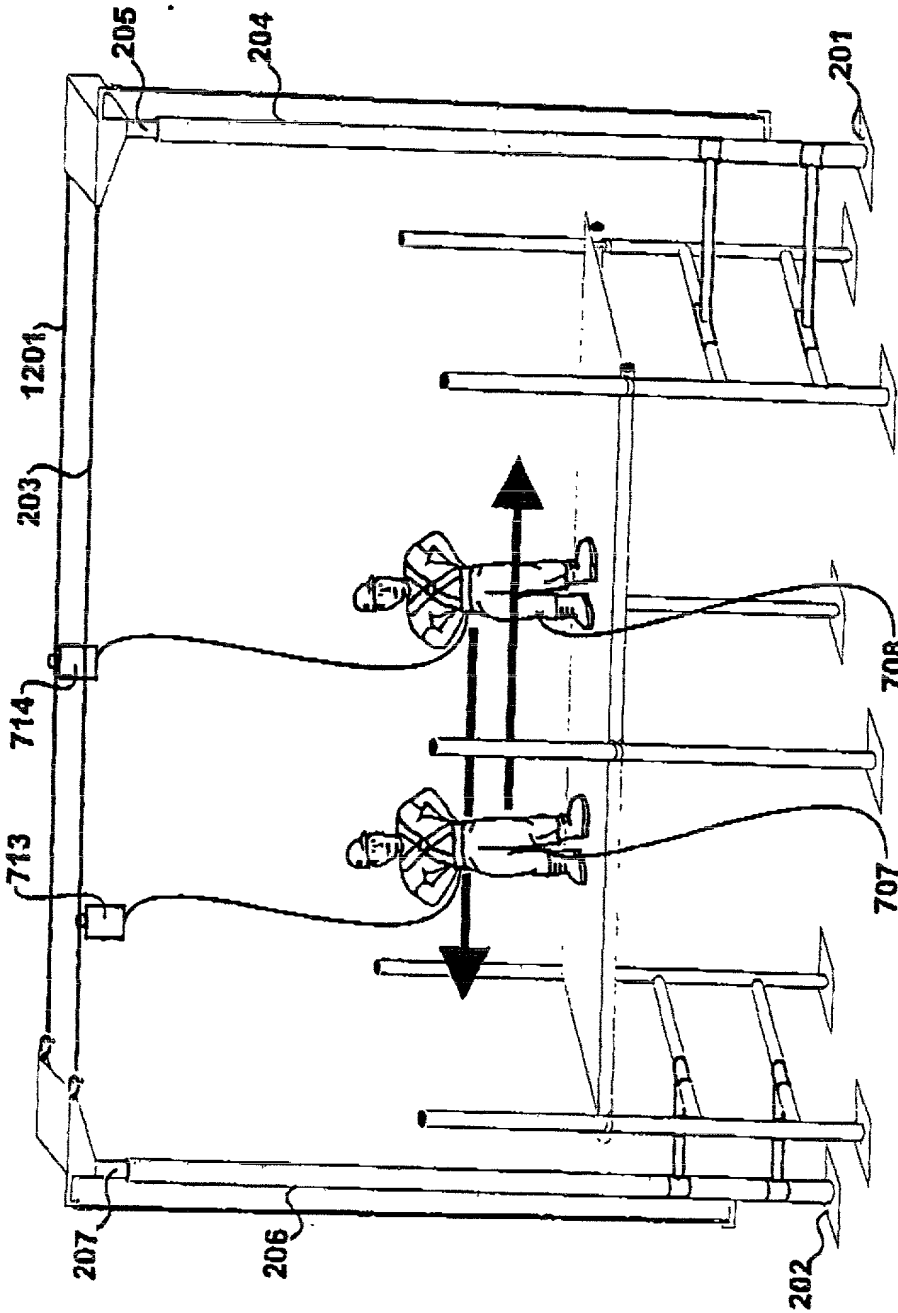


Figure 12

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (10-00)

Approved for use through 10/31/2002 OMB 0651-0032

U S Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR  
DESIGN  
PATENT APPLICATION  
(37 CFR 1.63)**

☐ Declaration Submitted with Initial Filing OR ☒ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number

ATKINSON

First Named Inventor

MURTEN

**COMPLETE IF KNOWN**

Application Number

09 / 857,867

Filing Date

06/12/2001

Group Art Unit

Examiner Name

As a below named inventor, I hereby declare that:

My residence, mailing address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Adjustable Safety Cable

(Title of the Invention)

the specification of which

☐ is attached hereto

OR

☒ was filed on (MM/DD/YYYY) 06/12/2001

as United States Application Number or PCT International

(if applicable).

Application Number and was amended on (MM/DD/YYYY) 06/12/2001

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
9923976.6	GB	10/12/1999	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
0000507.4	GB	01/12/2000	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
0003970.1	GB	02/22/2000	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
0013595.4	GB	06/06/2000	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U S Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Washington, DC 20231

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (10-00)  
Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

## DECLARATION — Utility or Design Patent Application

Direct all correspondence to: ☐ Customer Number or Bar Code Label  OR ☒ Correspondence address below

Name James C. Wray

Address 1493 Chain Bridge Road

Address Suite 300

City McLean

State VA

ZIP 22101

Country US

Telephone (703) 442-4800

Fax (703) 448-7397

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR :

☐ A petition has been filed for this unsigned inventor

Given Name Stephen  
(first and middle [if any])

Family Name Murten  
or Surname

Inventor's  
Signature

Date

Residence: City Skellow, Doncaster

State

Country GB

Citizenship GB

Mailing Address The Limes

Mailing Address Off Old York Road

City Skellow, Doncaster

State

ZIP DN6 8LA

Country GB

NAME OF SECOND INVENTOR:

☐ A petition has been filed for this unsigned inventor

Given Name  
(first and middle [if any])

Family Name  
or Surname

Inventor's  
Signature

Date

Residence: City

State

Country

Citizenship

Mailing Address

Mailing Address

City

State

ZIP

Country

☐ Additional inventors are being named on the \_\_\_\_\_ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.

Please type a plus sign (+) inside this box → ☐

PTO/SB/81 (10-00)

Approved for use through 10/31/2002. OMB 0651-0035

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

## POWER OF ATTORNEY OR AUTHORIZATION OF AGENT

Application Number	09/857,867
Filing Date	06/12/2001
First Named Inventor	MURTEN
Group Art Unit	
Examiner Name	
Attorney Docket Number	ATKINSON

I hereby appoint:

☐ Practitioners at Customer Number  →

OR

Place Customer  
Number Bar Code  
Label here

☒ Practitioner(s) named below:

Name	Registration Number
James C. Wray	22,693
Meera P. Narasimhan	40,252

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

☒ Firm or  
Individual Name

James C. Wray

Address 1493 Chain Bridge Road

Address Suite 300

City McLean State VA Zip 22101

Country US

Telephone (703) 442-4800 Fax (703) 448-7397

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.  
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).

### SIGNATURE of Applicant or Assignee of Record

Name Stephen Murten

Signature

Date

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☐ \*Total of \_\_\_\_\_ forms are submitted.